

Gutta Percha Obturation Device

Fi-E & Fi-P



Guilin Woodpecker Medical Instrument Co.,Ltd. Information Industrial Park,Guilin National High-Tech ne,Guilin,Guangxi,541004 P.R.China Sales Dept: +86-773-5873196 E-mail: woodpecker@glwoodpecker.com Website: http://www.glwoodpecker.com ZMN-XC-076



WOODPECKER









0.2sec heating time

High-performance conversion system ensures the efficient cutting.

0.35mm bendable tip

Thinner tips can penetrate deeply into the narrow root canal, providing you a better treatment effect.

High precision temperature control

Constant temperature prevents scalding.

4 working temperatures

150°C, 180°C, 200°C, 230°C Suitable for different brands of gutta-percha on the market.

4 hours of endurance

WP5506 0.55mm 0.06

Large capacity battery & special heating system enable 1500 operations with a full charge.

Туре	Diameter	Taper	Туре	Diameter	Taper
WP3504	0.35mm	0.04	WP5508	0.55mm	0.08
WP4004	0.40mm	0.04	WP5510	0.55mm	0.10
WP4504	0.45mm	0.04	WP6012	0.60mm	0.12
WP5004	0.50mm	0.04	WP5508L	0.55mm	0.08



Disposable injection needle

Disposable injection needle for option, meeting strict infection control



Injection needle specifications

E20G-NR E23G-NR E25G-NR



Machine specifications

Main unit battery: 2000mAh


5 preset temperatures : 100°C, 120°C, 150°C, 180°C, 200°C



3 injection speeds: Slow, Medium, Fast




Charging time:
About 2.5h (3h for the first charge)

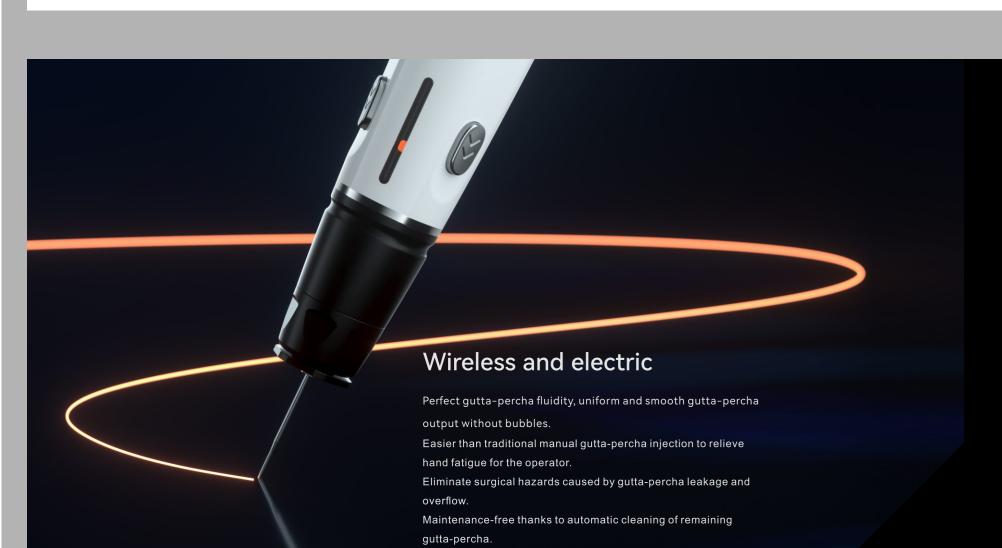



Dual batteries, more durable

2×2000mAh batteries, allowing quick replacement in 1 sec. Dual batteries deliver longer endurance, enabling filling about 100 root canals.



The gutta-percha bar is directly loaded into the injection

There is no gutta-percha residue inside the machine, making it easier to clean.

Dual button design

Symmetrically-designed dual injection buttons, sensitive and

convenient.

The gutta-percha bar can be replaced at any time without waiting for the internal cooling of machine.

Charging base enables battery temperature monitoring, guaranteeing more secure charging. Precise and intuitive display of remaining gutta-percha

> An indication window is set on the front of the machine to display the remaining gutta-percha intuitively and accurately.


Charging base with battery

temperature monitoring design



Compact and lightweight Easier to hold

Diameter: 26mm*26mm Length: 200mm Weight: 148g



Protection system

Auto heating stop after timeout Auto shutdown after timeout